



PRODUCT
CATALOGUE




920002087 966+



sales@citysystems.sa
www.citysystems.com.sa



Riyadh Branch, Khobar
Branch, Jeddah Branch

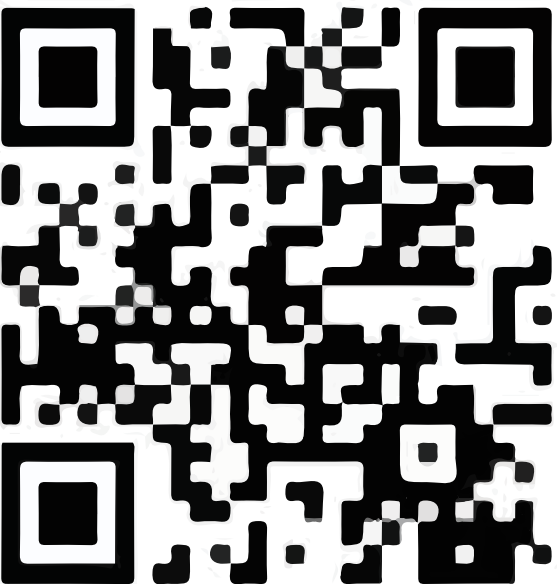


CITYPOS

TABLE OF CONTENTS

TERMINAL	01 – 04
CASH DRAWER	05 – 08
RECEIPT PRINTER	09 – 20
RECEIPT PRINTER ACCESSORIES	21 – 24
SCANNER	25 – 36
SCANNER ACCESSORIES	37 – 40
ID CARD PRINTER	41 – 42
WEIGHING SCALE	43 – 50


CP-TW-910VFD

TERMINAL WITH VED
BACK DISPLAY

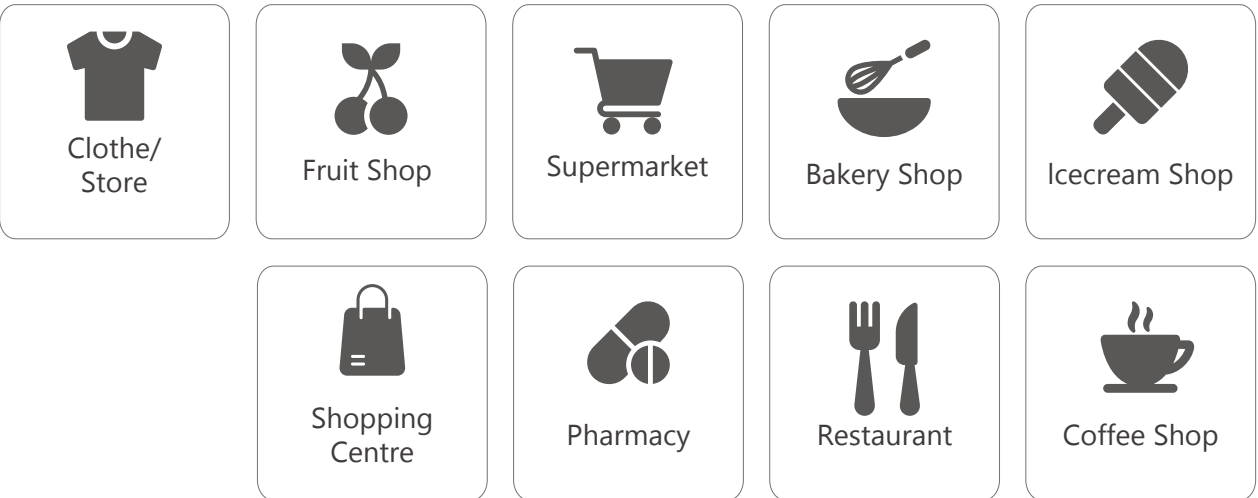

Features


- ▶ Bezel Free Tablet-like Touch Screen
- ▶ 15.6 Inches Wide Screen
- ▶ Easy Operation
- ▶ With Stable and Firm Stand
- ▶ Fashionable and Elegant Appearance

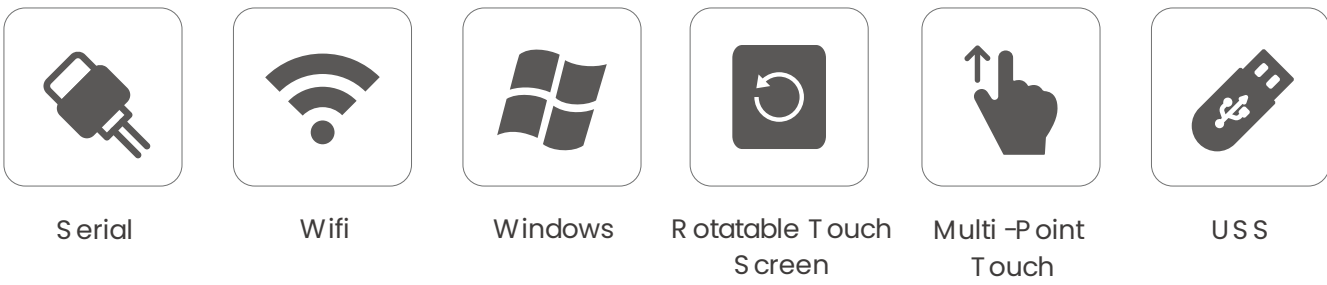

Main Specification	
Processor	Intel J1 900(2.0GHz Quad core)
Memory	DDR III 4G
Hard Disk	1 28G SSD
Panel	1 5.6" 1 6:9 Industrial grade panel
Touch screen	True Flat Capacitive Touch
Resolution	1080*1920
Brightness	220nits
Power supply	Input:110V240~V 63/50Hz 2A, Output:12V DC 5A 60W MAX
Specification	
USB	5*USB ports
COM	1*COM port
LAN	1 *LAN port
VGA	1 *VGA port
Audio	1*Audio input (MIC); 1*Audio output
HDMI	---
Optional	
Customer Display	VFD 2 line, 20 digits/LED 8N, 8 digits/11.6 inch LCD
MSR	-3track MSR
Color	Black
OS	Windows1 0
Package	
N.W.	5 kgs
N.W.	7 kgs
Package Size	425*260*405mm


CP-TW-910LED

TERMINAL WITH LED
BACK DISPLAY

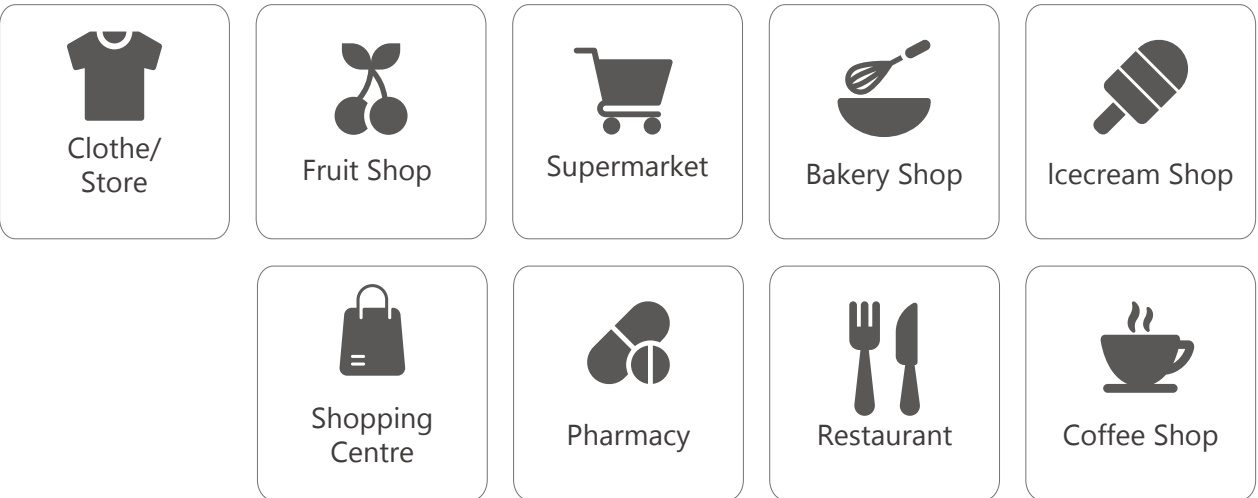

Features


- ▶ Bezel Free Tablet-like Touch Screen
- ▶ 15.6 Inches Wide Screen
- ▶ Easy Operation
- ▶ With Stable and Firm Stand
- ▶ Fashionable and Elegant Appearance

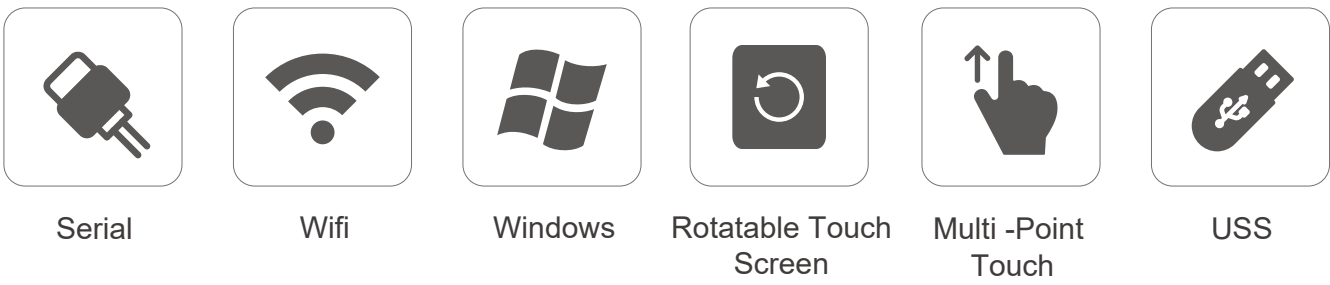

Main Specification	
Processor	Intel J1 900(2.0GHz Quad core)
Memory	DDR III 4G
Hard Disk	1 28G SSD
Panel	1 5.6" 1 6:9 Industrial grade panel
Touch screen	True Flat Capacitive Touch
Resolution	1080*1920
Brightness	220nits
Power supply	Input:110V240~V 63/50Hz 2A, Output:12V DC 5A 60W MAX
Specification	
USB	5*USB ports
COM	1*COM port
LAN	1 *LAN port
VGA	1 *VGA port
Audio	1*Audio input (MIC); 1*Audio output
HDMI	---
Optional	
Customer Display	VFD 2 line, 20 digits/LE D 8N, 8 digits/11.6 inch LCD
MSR	-3 track MSR
Color	Black
OS	Windows1 0
Package	
N.W.	5 kgs
N.W.	7 kgs
Package Size	425*260*405mm

CS603-S

CASH DRAWER

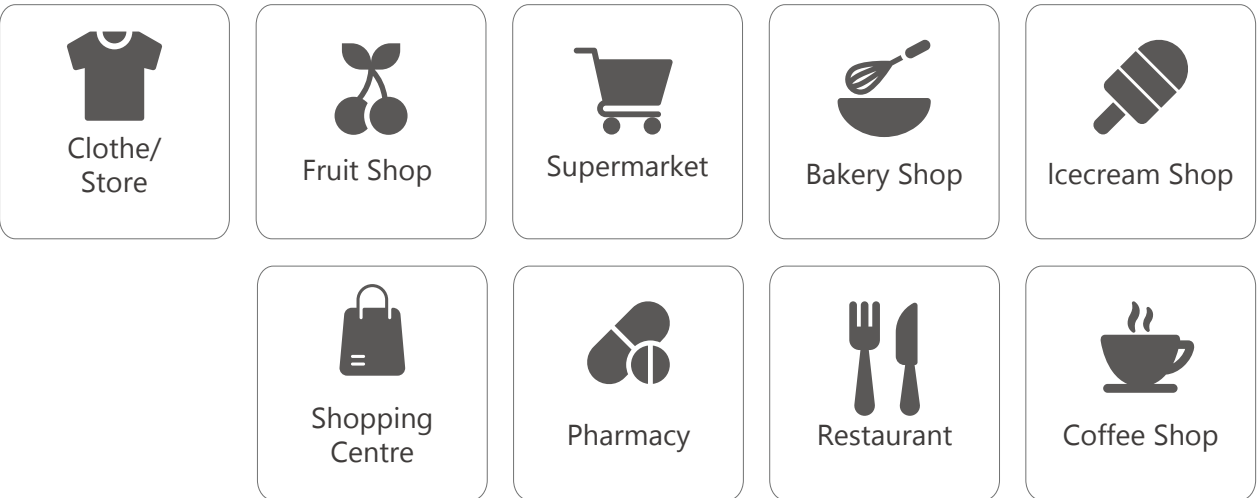


Features

- ▶ Frame: Thick gauge cold rolled steel & SECC
- ▶ -3position key lock: locked, manual open and electrically online
- ▶ Heavy-duty ball bearing rollers
- ▶ Removable cash & coin tray
- ▶ Adjustable money clip (wire grips) & dividers
- ▶ 1 or 2 Media slots
- ▶ Different or unified code key lock

Main Specification	
Dimensions	405 W x 420 D x 90 H (mm, with Feet) 15.9"W x 16.5"D x 3.5"H (inch, with Feet)
Drawer	Plastic drawer
Casing	Steel construction
Front Panel	Stainless Steel
Bill Tray	Metal wire bill clips Fixed dividers for 5 compartments (with 5 metal wire clips)
Coin Tray	Removable coin box from coin tray
Media slot	Front access slot for check, credit card receipt or any paper
Lock	-3position Key Lock
Micro Switch / Sensor	Open by driver signal to the solenoid (option)
I/O Interface	6V, 12V, 24V for RJ11 / RJ12 / Jack2.5 Receipt Printer Interface
Durability	000 ,1,000 operations
Colour	Computer white, Black or Customization
Packaging	470 W x 500 D x 160 H (mm) 18.5"W x 19.7"D x 6.3"H (inch)
Net Weight	4.9 kgs
Gross Weight	5.5 kg

CS604-S

CASH DRAWER

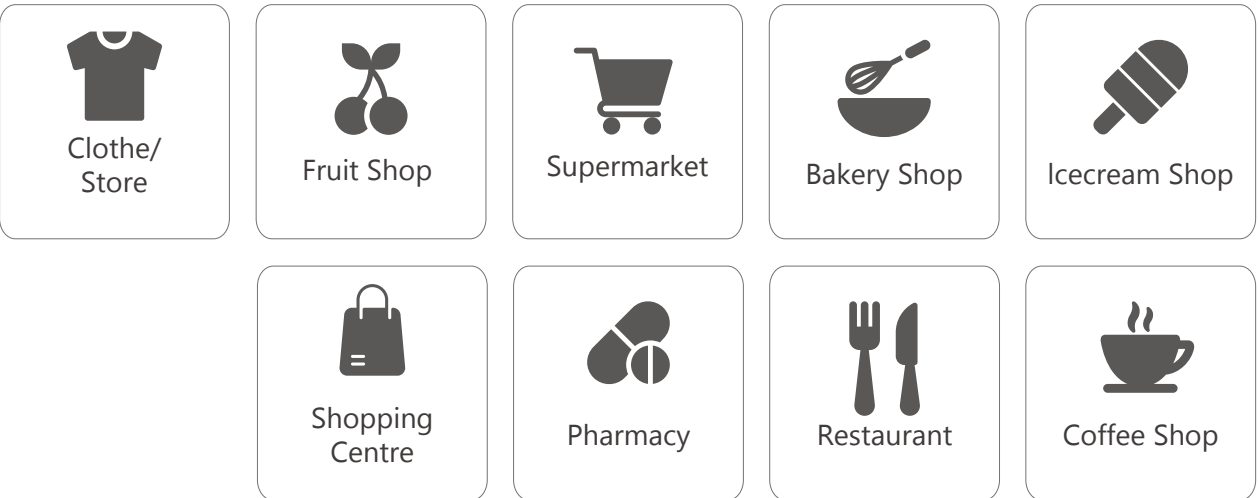

Features

- ▶ Frame: Thick gauge cold rolled steel & SECC
- ▶ -3position key lock: locked, manual open and electrically online
- ▶ Heavy-duty ball bearing rollers
- ▶ Removable cash & coin tray
- ▶ Adjustable money clip (wire grips) & dividers
- ▶ 1 or 2 Media slots
- ▶ Different or unified code key lock

Main Specification	
Dimensions	420 W x 420 D x 100 H (mm, without Feet) 16.5"W x 16.5"D x 3.9"H (inch, without Feet)
Drawer	Plastic drawer with pulley track
Casing	Steel construction
Front Panel	Painted front or stainless steel front (option)
Bill Tray	Metal bill clips
Coin Tray	Removable tray from the money case Double-row tray with adjustable dividers for up to 6 compartments
Media slot	Front access single slot for check, credit card receipt or any paper
Lock	3-position Key Lock
Micro Switch / Sensor	Open by driver signal to the solenoid (option)
I/O Interface	12V, 24V for RJ11 / RJ12 Receipt Printer Interface 9-Pin RS-232 Interface (option) USB Interface (option)
Durability	1,000, 000 operations
Colour	Black
Packaging	485 W x 470 D x 160 H (mm) 19.1"W x 18.5"D x 6.3"H (inch)
Net Weight	5.2 kgs
Gross Weight	6.3 kgs





CP-P100U

Thermal Receipt
Printer



Features

- ▶ Print head over-heat protection, making print head more durable
- ▶ Intelligent cutter to avoid paper jam
- ▶ Low energy consumption, more economic
- ▶ Autocutter for convenient printing15.6 Inches Wide Screen



Main Specification	
Printing method	Direct thermal
Printing speed	200mm/s
Paper width	5 0 -+ 5 79mm
Printable area	72mm
Maximum paper diameter	Φ80 mm
Paper thickness	0.08-0.06mm
Column capacity	576 dots/line 512 dots/line
Line space	3.75mm(Changeable by commands)
Commands	Compatible with ESC/POS
Interface type	USB
	ANK, Font A: 24×12 dots Font B: 17×9 dots Simplified/traditional Chinese: 24x24 dots
Dimension	135×140×184mm (D×W×H)
Gross weight	1.0 kg
Bar code	UPC-A/UPC-E/JA(EAN13)/JAN8(EAN8)/CODE39/ITF/CODABAR/CODE93/CODE128
Code page	PC347(Standard Europe),Katakana,PC850(Multilingual),PC860(Portuguese), PC863(Canadian-French),PC865(Nordic),WestEuropeGreek, Hebrew, East Europe, Iran,WPC1252, PC866(Cyrillic2#),PC852(Latin2),Pc858, IranII, Latvian, Arabic, PT1251)151)
Cutter	Partial
Cutter life	1.5 million cuts
Print head life	150KM
Input buffer	64 Kbytes
NV Flash	256 Kbytes
Power adaptor	AC110V/220V, 60~50Hz
Power source	DC 24V/2.5A
Input voltage	DC 24V/2.5A
Cash drawer output	DC 24V/1A
Work environment	Temperature: 45~0 , humidity: 80~10RH%
Storage environment	Temperature: 60~10- , humidity: 90~10RH%
Operating system	Win XP/Win Vista/Win 7/Win 8/Win 8.1/Win 10/Linux




CP-P120U

Thermal Receipt
Printer



Features

- ▶ Print head over-heat protection, more durable
- ▶ Intelligent cutter to avoid paper jam
- ▶ Low energy consumption, more economic
- ▶ Auto cutter for convenient printing
- ▶ IAP online upgrade, easy to maintain
- ▶ Queue ticket printing



Main Specification	
Printing method	Direct thermal
Printing speed	200mm/s
Paper width	5 0 + 5 79mm
Printable area	72mm
Maximum paper diameter	Φ80 mm
Paper thickness	0.08-0.06mm
Column capacity	576 dots/line 512 dots/line
Line space	3.75mm(Changeable by commands)
Commands	Compatible with ESC/POS
Interface type	USB+Lan
	ANK, Font A: 12×24 dots, Font B: 9×17 dots Simplified/traditional Chinese: 24x24 dots
Dimension	135×140×184mm (D×W×H)
Gross weight	1.0 kg
Bar code	UPC-A/UPC-E/JA(EAN13)/JAN8(EAN8)/CODE39/ITF/CODABAR/CODE93/CODE128
Code page	PC347(Standard Europe), Katakana, PC850(Multilingual) , PC860(Portuguese), PC863(Canadian-French), PC865(Nordic), WestEuropeGreek, Hebrew, East Europe, Iran, WPC1252, PC866(Cyrillic2#), PC852(Latin2), Pc858, IranII, Latvian, Arabic, PT1251)151)
Cutter	Partial
Cutter life	1.5 million cuts
Print head life	150KM
Input buffer	128 Kbytes
NV Flash	256 Kbytes
Power adaptor	AC110V/220V, 60~50Hz
Power source	DC 24V/2.5A
Input voltage	DC 24V/2.5A
Cash drawer output	DC 24V/1A
Work environment	Temperature: 45~0 , humidity: 80~10RH%
Storage environment	Temperature: 60~10- , humidity: 90~10RH%
Operating system	Win XP/Win Vista/Win 7/Win 8/Win 8.1/ Win10 /Linux

CP-P233BU

Thermal Barcode
Printer





Features

- ▶ Various label width, can be 20mm60-mm
- ▶ Label paper auto detection
- ▶ Temperature control function
- ▶ Modularity design and meet with various applications
- ▶ Support QR CODE Printing and Bluetooth

CP-P233BU

Thermal Barcode
Printer



Printing Features	
Resolution	203 DPI
Printing method	Direct Thermal
Print speed	101~50.8 mm/s - 90 mm/s
Print width	Max 56 mm - 48mm
Media	
Media type	Thermal stickers paper/ adhesive paper - Paper End, Cover Open
Media width	60~20 mm - 58mm
Media thickness	0.08 ~ 0.06 mm
Media roll diameter	Max.100 mm
Performance Features	
Input buffer	4096 Kbytes - 4096 Kbytes
NV flash	4096 Kbytes - 4096 Kbytes
Interfaces	USB/USB+Serial/USB+Bluetooth
Sensors	Paper End, Cover Open, Gap - Paper End, Cover Open
Drawer port	1 ports (Pin 2 for cashdrawer)
Fonts/Graphics/Symbologies	
Character	Font 0 to Font8 - Font A: 12x24, Font B: 9x17, CHN: 24*24
ID barcode	CODE128 、EAN128 、ITF 、CODE39 、CODE39C 、CODE39S 、CODE93 、EAN13 、EAN2+13 、EAN5+13 、EAN8 、EAN2+8 、EAN5+8 、CODABAR 、POSTNET 、UPC-A、UPCA2+ 、UPCA5+ 、UPCE 、UPCE2+ 、UPCE5+ 、MSI 、MSIC 、PLESSEY 、ITF14 、EAN14 Coda Bar, Code 39, Code 93, Code 128, EAN8-, EAN13-, ITF, UPC-A, UPC-E
2D bar code	QRCODE, PDF417, Data Matrix
Emulaion	TSPL - ESC/POS
Physical Features	
Dimension	190 x 135 x 137mm (D×W×H)
Weight	1.18 kg
Reliability	
Print head life	50 km
Software	
Driver	Windows - / Windows/ Linux/ Mac/ Android
SDK	iOS/ Android/ Windows
Power supply	
Input	240-100V 60/50H
Output	DC 12V/3A
Environmental Conditions	
Operation	45~5 ℃; %80 ~ 20RH
Storage environment	55 ~ 40-℃; ≤93%RH




CP-P470BU

Thermal Barcode
Printer



Features

- ▶ High quality double-walled clamshell design
- ▶ 203 dpi resolution models Head-up sensor
- ▶ 8MB SDRAM, 8 MB Flash




Printing Features	
Resolution	203 DPI
Print method	Direct Thermal
Max.print speed	152mm(6")/s
Max.print width	108 mm (4.25")
Max.print length	1778 mm (70")
Media	
Media type	Continuous, gap, black mark, fan-fold and punched hole
Media width	118~25.4mm (4.6~"1.0")
Media thickness	0.25 ~ 0.06 mm (9.8 ~ 2.36 mil)
Media core diameter	76.2~25.4 mm (3~"1")
Label length	1778~10 mm (70~"0.39")
Label roll capacity	127 mm (5") OD (External diameter)
Performance Features	
Processor	~32bit CPU
Memory	8MB Flash Memory/ 8MB SDRAM/ Flash memory can be expanded Max.4Gb
Interface	Standard: USB TF card, Optional: Serial/Lan/WIFI/Bluetooth
Fonts/Graphics/Symbologies	
Internal fonts	8 alpha-numeric bitmap fonts, Windows fonts are downloadable from software.
1D barcode	Code 39, Code 93, Code 128UCC, Code 128 , subsets A, B, C, Codabar, Interleaved 2 of 5, EAN-8,EAN-13, EAN-128, UPC-A, UPC-E, EAN and UPC 5)2) digits add-on, MSI, PLESSEY, POSTNET, China POST
2D barcode	PDF-417, Maxicode, DataMatrix, QR code
Rotation	°0、 °90、 °180 、 °270
Emulaion	TSPL 、 EPL 、 ZPL 、 DPL
Physical Features	
Dimension	240(D) x 212(W) x172(H)mm
Weight	1.58kg
Reliability	
Warranty	One year
Print head	30 km
Software	
Driver	Windows / Linux / Mac
SDK	Windows / Android / iOS
Power supply	
Input	DC 24V/2.5A (Printer input: DC 24V/2.5A)
Output	DC 24V, 2.5A, 60W
Options	
Factory Options	① Serial ② Lan ③ WIFI ④ Bluetooth ⑤ Peeling machine
Dealer Options	① External paper roll holder and 1 "paper roll ② Extension board for external paper roll holder ③ Shipment waybill box
Environmental Conditions	
Operation	°40 ~ 5C(°104~41F) , Humidity: %85 ~ 25 non-condensing
Storage environment	°60 ~ 40~C(°140~40~F) , Humidity:%90 ~ 10 non-condensing

CP-TT428B


Thermal Barcode
Printer




Logistics &
Warehouse



Printing



Manufacturing



Retail
Marketing






Features

- ▶ Dual-motor, side clamshell design
- ▶ 200mm/s (8"/s) Printing Speed, make daily task more efficient;
- ▶ 300m ribbon capacity, up to 214mm (8.4")OD label capacity design;
- ▶ 8MB Flash and 8MB SRAM memory
- ▶ Compatible with TSPL/EPL/ZPL/DPL, perfect alternative for your barcode project;
- ▶ Standard USB2.0 port
- ▶ Bartender Label edit software & Windows driver available;
- ▶ LCD control panel for optional, which allows user control the printer with repeat task without computer.

CP-TT428B

Thermal Barcode
Printer



Main Specification	
Resolution	203 DPI
Printing method	Thermal Transfer/ Direct Thermal
Max.print speed(Max.)	200mm (8") / s
Max.print width(Max.)	104 mm (4.09")
Max.print length(Max.)	1778 mm (70")
Media winding	Front feed paper
Media type	Continuous, gap, black mark, fan-fold and punched hole
Media width	115- 25.4 mm
Media thickness	0.25- 0.06 mm
Ribbon length	300m
Ribbon width	25.4mm110-mm (4.3-"1")
Label length	1778-10mm
Enclosure	ABS plastic
Dimension	246 mm(D) x 223 mm(W) x 204 mm(H)
Weight	2.47kg
Processor	32 bit RISC CPU
Memory	8MB FLASH memory/ SRAM BM
	MicroSD Flash memory expansion up to 4GB
Interface	Standard: USB 2.0/TF Card ; Optional: RS232- I Ethernet/ WIFI / Bluetooth
Power supply	Input: AC 240-110V
	Output: DC 24V
Control panel	3 LEDs, 4 buttons [Standard version] ; LCD screen, 4 buttons [Pro version];
Sensors type	Gap sensor, Open cover sensor, Black Label sensor, Ribbon sensor
Internal fonts	8 alpha-numeric bitmap fonts
	Windows fonts are downloadable from software
Barcodes	1D bar codeLJ Code 39, Code 93, Code 128UCC, Code 128 subsets A, B, C, Codabar, Interleaved 2 of 5, EAN-8,EAN-13, EAN-128, UPC-A, UPC-E, EAN and UPC 2(5) digits add-on, MSI, PLESSEY, POSTNET, China POST, GS1 DataBar, Code 11
	2D bar code□ PDF-417, Maxicode, DataMatrix, QR code, Aztec
Font and barcode rotation	°270 / °180 / °90 / °0
Printer language	TSPL/EPL/ZPL/DPL
Environment condition	Operation temperature:°5C°40-C(°41F104- °F), Humidity (non-condensing): %85-%25
	Storage : °40-C°60-C{°40-F°140-F), Humidity (non-condensing): %90-%10
Safety regulation	FCC/CE/CCC/CB
Printout deviation	Vertical: 1 mm (Max). / Level: 1 mm (Max).
Standard accessories	① Windows labeling software , driver and user manual CD ② Quick start guide ③ USB cable ④ Power cord ⑤ External switching power adapter ⑥ Paper roller ⑦ Ribbon roller ⑧ Ribbon recycling paper tube ⑨ Paper ⑩ Ribbon ⑪ External Label Case
Factory Options	① RS115200-2400)232- bps) ② Bluetooth ③ WiFi ④ Real time clock ⑤ Ethernet ⑥ LCD/LED(Must choose one)
Dealer options	① external roll mount (1"core) ; ② Bluetooth (RS232-C) ; ③ WiFi ; ④ External roll mount board ;

P323B

Portable Label Printer






Features

- ▶ Support direct USB charging;
- ▶ Long lasting battery life;
- ▶ Dual mode bluetooth;
- ▶ OLED screen available;
- ▶ TSPL, EPL, ZPL, DPL, CPCL, ESC/POS command compatible.

P323B


Portable Label Printer



Main Specification	
Printing Method	Direct Thermal
Resolution	8 dots/mm(203 DPI)
Interface	USB+Bluetooth
Real Time Clock	Standard
Max Print Speed	70mm/s (2.7"/s)
Max Print Width	72mm (2.8")
Max Print Length	1778mm(70")
Media Type	Continuous, gap, black mark;
Media Width	20 mm~ 76 mm
Media Thickness	0.06 mm ~ 0.08 mm
Media Length	10 mm ~1778 mm
Label Roll Capacity	50mm (Diameter)
Memory	8MB Flash Memory 8MB SDRAM Micro SD card reader for Flash memory expansion, up to 4GB
Sensor	Gap sensor Printer Head opened sensor Black mark sensor Paper end sensor
Processor	-32bit RISC CPU
Power Supply	Input: AC 240-100V; Output: DC 9V/2A
Barcode	1D barcode:Code128 subsets A.B.C,Code128UCC, EAN128, Interleave 2 of 5, Code 39,Code 93, EAN13-, EAN8-, Codabar, POSTNET, UPC-A, UPC-E, EAN and UPC 5)2) digits, MSI, PLESSEY, China Post, ITF14, EAN14, Code 11, TELPEN, PLANET, Code 49, Deutsche Post Identcode, Deutsche Post Leitcode, LOGMARS 2D barcode: DataMatrix, Maxicode, PDF-417, QR code;
Emulation	TSPL-EZ (EPL, ZPL), DPL, CPCL, ESC/POS
Dimension	124mm*108mm*61 mm (W*H*D)
Weight	357.3 g
Power	Output: AC 9V2-A
Battery	7.4V / 2500mAh
Safety Standard	Operation condition: 40 ~ 5 °C (104 ~ 41 °F) ,%85 ~ 25 non-condensing
Environment	Storage condition : 60 ~ 40- °C (140 ~ 40- °F), %90 ~ 10 non-condensing

CP-PH900

Universal Printer External
Label Holder

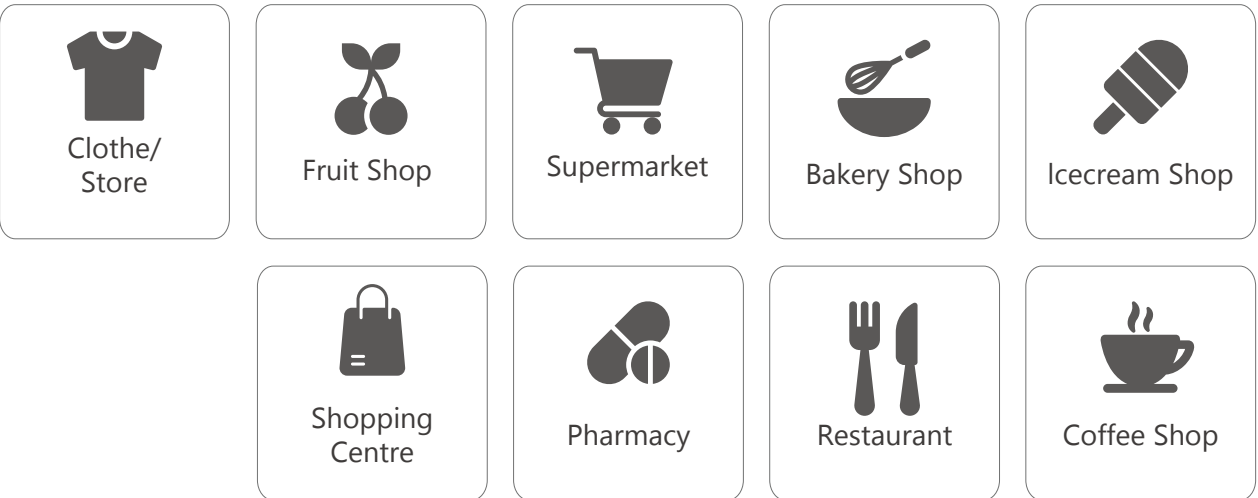


Features

- Suitable for different 4 inch label printers
- Maximum -8inch label rolls diameter
- Support 4-1 inches different label width
- Stable design to hold the label rolls

Main Specification	
Gross Weight	540 g
Product size	(width x depth x height): 20.5 x 27.0 x 26.5 cm
Packages size	30.0 x 21.5 x 5.0 cm
Master pack	40
Material	beige plastic
Configurable coil width	up to 15 cm.
Height	Up to the support mast 13.5 cm

70*80MM

Thermal Receipt Paper

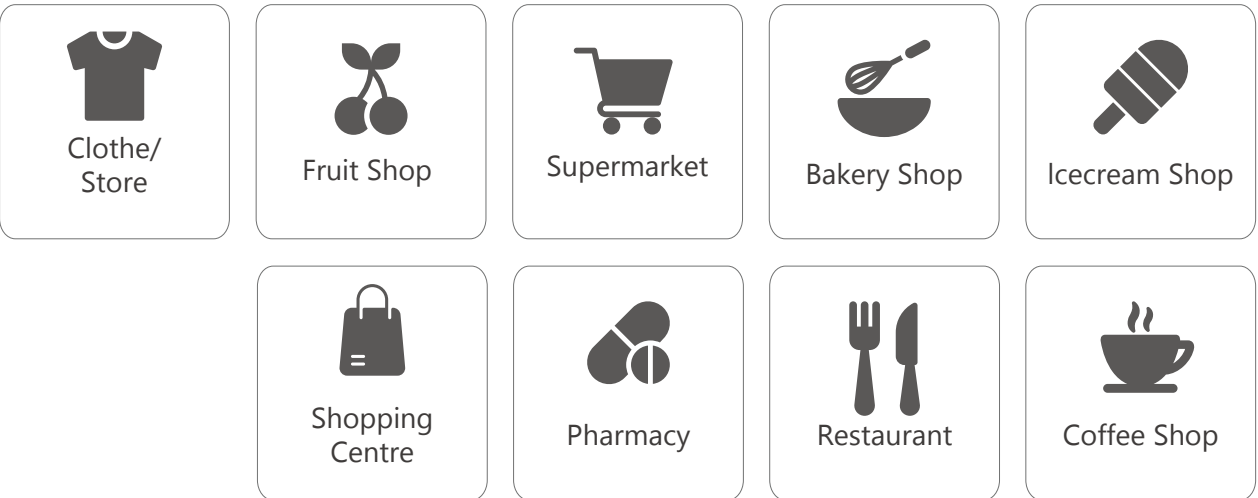

Features


- ▶ High brightness, up to 5 years image life, smooth surface with lowest fray on printer heads.
- ▶ Paper has a glossy, white, and smooth surface and it can deliver a clear & black print-out image.
- ▶ Specialty paper that has coating with a chemical that changes color when exposed to heat.
- ▶ Smaller foot print & Light weight

Main Specification

Type	Cash register paper
Roll Width	80mm
Diameter	70mm
Length	54.9meters
Duration	3years
Grammage	55gsm
Core size	customized
MOQ	5,000 roll
Weight	48gsm, 51gsm, 55gsm, etc.
Layer/2 or 3 layers	AC 200V~240V, 60/50Hz
Package	EM Packing, nutural packing, shrink-wrapping, Black/blue/white bag packing; Golden/Silver glossy paper packing

CP100-i-USB

Industrial 1D Laser Scanner

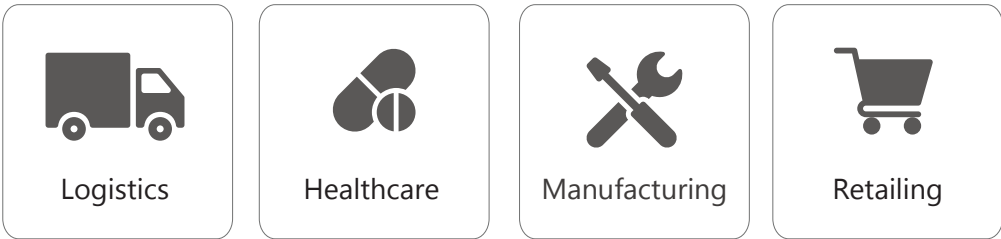


Features

- ▶ **Excellent Identification Ability:** High performance scanning module, decoding barcode with speed of 300 times/s.
- ▶ **Long Service Life:** Scan button with over 30 million times operation, and adopted ultra low power consumption.
- ▶ **Convenient and Comfortable Operation:** Fashionable and ergonomics design, boost work efficiency and convenient for long hours of usage
- ▶ **High Quality:** Adopt high quality wires and inflaming retarding materials with the international standard, recyclable and practical shell to protect the device.
- ▶ **Industrial Grade Durability:** IP54 industrial grade, and bear the height of 2m dropping and ground impact

Performance Parameters	
Light source	650nm laser
Decoding speed	≥300 times/s
Decode capability	UPC/EAN, UPC/EAN with supplements, ISBN/ISSN, UCC, Code 128, Code 39, Code 39 (Full ASCII), code 32, code 11, Interleaved 2of 5, Matrix 2 of 5, Discrete 2 of 5, Codabar, MSI/Plessey, Chinese 2 of 5, China Postal Code, GS1 DataBar, etc.
Scan Angle	°52± , °65± , °42± (Roll, Skew, Pitch)
Scan precision	≥ 3mil
Print contrast	%20
Prompt mode	Buzzer, LED indicator light
Interface	USB, USB-COM
Trigger mode	Manual, Continuous automatic scan and auto sensing scanning (optional)
Setting method	Scan configuration barcode
Current	25mA (standby), 95mA (working)
Physical Parameters	
Over dimension	L X W X H (102x73x182mm)
Weight	172g
Material	ABS+PC environmentally friendly materials
Environmental Parameters	
Working temperature	°20-C to °50C
Storage temperature	°40-C to °60C
Anti-drop	Withstand drop from 2m to concrete floor
Humidity	%5 to %95 RH
IP grade	IP54
Circumstance luminance	0-100,000Lux

CP110-i-USB

Industrial 2D Laser Scanner

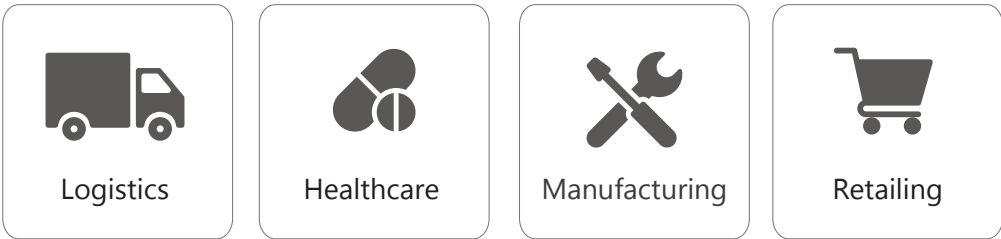



Features

- ▶ **Excellent Identification Ability:** High performance scanning module, easily decode all common 1D and 2D symbologies.
- ▶ **Long Service Life:** Scan button with over 30 million times operation, and adopted ultra low power consumption.
- ▶ **Convenient and Comfortable Operation:** Fashionable and ergonomics design, boost work efficiency and convenient for long hours of usage.
- ▶ **High Quality:** Adopt high quality wires and inflaming retarding materials with the international standard, recyclable and practical shell to protect the device.
- ▶ **Industrial Grade Durability:** IP54 industrial grade, and bear the height of 2m dropping and ground impact.

Performance Parameters	
Light source	Visible red light emitting diodes (610-640nm) for aiming
Image sensor	CMOS
Decode capability	1D: UPC/EAN, UPC/EAN with supplements, ISBN/ISSN, UCC, Code 128, Code 39, Code 39 (Full ASCII), code 32, Interleaved 2of 5, Matrix 2 of 5, Discrete 2 of 5, Codabar, MSI/Plessey, Chinese 2 of 5, China Postal Code, GS1 DataBar, etc. 2D: PDF417, Data Matrix, QR, Aztec, Maxicode, etc.
Scan Angle	°55± ,°60± ,°360± (Roll, Skew, Pitch)
Scan precision	≥ 4mil
Print contrast	%20
Prompt mode	Buzzer, LED indicator light
Interface	USB, USB-COM
Trigger mode	Manual, Continuous automatic scan and auto sensing scanning (optional)
Setting method	Scan configuration barcode
Current and voltage	35mA (standby), 160mA (working), 5 VDC %10±
Physical Parameters	
Over dimension	L X W X H (102x73x182mm)
Weight	172g
Material	ABS+PC environmentally friendly materials
Environmental Parameters	
Working temperature	°20-C to °50C
Storage temperature	°40-C to °60C
Anti-drop	Withstand drop from 2m to concrete floor
Humidity	%5 to %95 RH
IP grade	IP54
Circumstance luminance	0-100,000Lux

CP200-i-W

1 D Handheld Wireless
Barcode Scanner



Features

- **Consistent, fast and accurate:** CP300-i-W barcode scanner can fast and accurately read dirty barcode, damaged barcode, duplicated barcode, applies to different applications.
- **Network Mode Available:** One to one, More to one. Multiple scanners can transmit data to the one wireless receiver – ideal in a warehouse where several people are scanning at once.
- **Superior decoding performance:** The barcode scanner can reach 350+50 scans per second, fast and accurate,can help to improve your working efficiency
- **Perfect process design and ultimate experience:** CP-300i-W uses imported ABS material, high quality rubber is a good buffer against impact. Nice design makes it different and popular. It applies to cashier for mobile payment and Logistics &Express.
- **Long life span:** Shockproof and Anti-broken The barcode scanner, after 1.2 drop onto concrete surface floor, still works well.Famous brand C&k button The barcode scanner uses world famous brand C&k trigger button, even after 1,500,000 times trigger, it still works normally.



ID




Screen scanning



2500pix imaging



RF33 4



Super decoder



Free USB driver




Fast scan

Main Specification	
Communications	RF433
Transmission range	<100M(In empty area 100M)
Interface	USB HID keyboard/RS232/ USB VCP(Wireless receiver)
Operation mode	Read-time mode, Inventory mode, Cache mode
Memory	13@ 100,000Byte barcode
Battery capacity	1500mAh (Lithium battery)
Charging time	4.5h
Working time (Full charge)	6h(Continuous reading situation) 12h(Manual reading situation) More than 15 days(Stand-by time)
Voltage requirement	DC 5V%10±(scanner)
Current consumption	Max: 138mA
Light source	632nm Red LED
Photo sensor	CCD linear sensor
Sensor Resolution	2500pix
Scan rate	50±350 (scans/second)
Decode angle	Pitch angle:°30± Skew angle:°75± Tilt angle:°45±
Min resolution	0.101 mm/4mil(PCS 0.9)
Min .PCS value	>%25UPC/EAN 13)13mil)
Compatibility	Win OS / Mac OS/ Linux Android/IOS/Embedded OS
Decode Capability	1D: EAN13, EANS, UPCA, UPC E, CODABAR(NW7-), CODE 39, CODE 93, INTERLEAVED 2OF5, STANDARD 2OF5, MATRIX 2OF5, CODE 128, EAN/UCC 128, CODE 11, CHINESE POST
Environmental	RoHS
Dimensions	Scanner:97mmx67mmx165mm(L *W*H) Receiver:55mmx24mmx8mm(L *W*H)
Weight	Scanner 162g Receiver 5g

CP300-i-W

1 D Handheld Wireless
Barcode Scanner

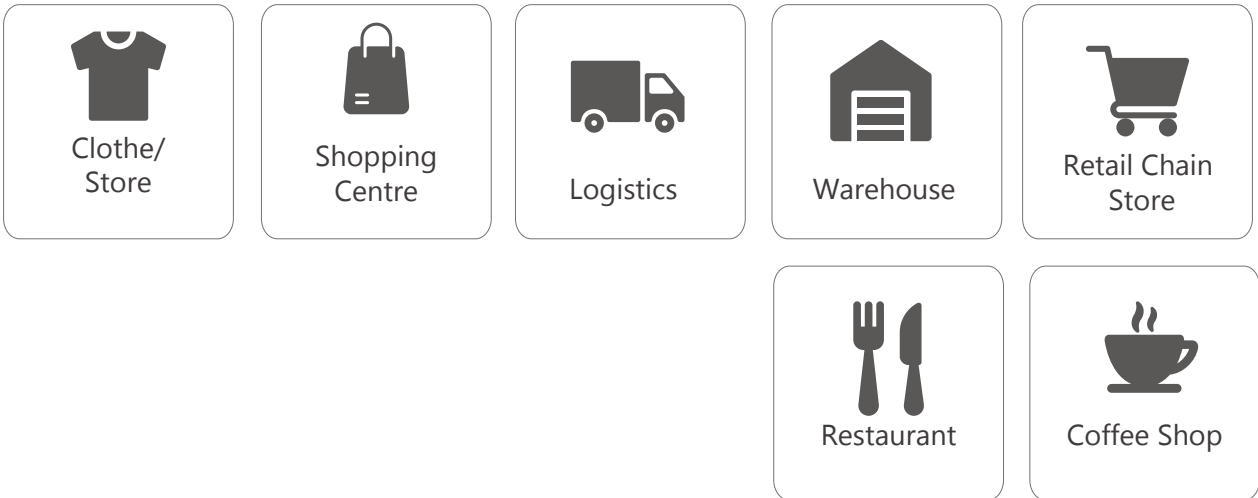

Features

- **Consistent, fast and accurate:** CP300-i-W barcode scanner can fast and accurately read dirty barcode, damaged barcode, duplicated barcode, applies to different applications.
- **Network Mode Available:** One to one, More to one. Multiple scanners can transmit data to the one wireless receiver - ideal in a warehouse where several people are scanning at once.
- **Superior decoding performance:** The barcode scanner can reach 350+50 scans per second, fast and accurate,can help to improve your working efficiency.
- **Perfect process design and ultimate experience:** CP-300i-W uses imported ABS material, high quality rubber is a good buffer against impact. Nice design makes it different and popular.
- **Long life span:** Shockproof and Anti-broken The barcode scanner, after 1.2 drop onto concrete surface floor, still works well. Famous brand C&k button The barcode scanner uses world famous brand C&k trigger button, even after 1,500,000 times trigger, it still works normally.



ID




Screen scanning



2500pix imaging



RF33 4



Super decoder



Free USB driver




Fast scan

Main Specification	
Communications	RF433
Transmission range	<100M(In empty area 100M)
Interface	USB HID keyboard/RS232/ USB VCP(Wireless receiver)
Operation mode	Read-time mode, Inventory mode, Cache mode
Memory	13@ 100,000Byte barcode
Battery capacity	2000mAh (Lithium battery)
Charging time	5h
Working time (Full charge)	6h(Continuous reading situation) 12h(Manual reading situation) More than 15 days(Stand-by time)
Voltage requirement	DC 5V%10±(scanner)
Current consumption	Max: 138mA
Light source	632nm Red LED
Photo sensor	CCD linear sensor
Sensor Resolution	2500pix
Scan rate	50±350 (scans/second)
Decode angle	Pitch angle:°30± Skew angle:°75± Tilt angle:°45±
Min resolution	0.101 mm/4mil(PCS 0.9)
Min .PCS value	>%25UPC/EAN 13)13mil)
Compatibility	Win OS / Mac OS/ Linux Android/IOS/Embedded OS
Decode Capability	1D: EAN13, EANS, UPCA, UPC E, CODABAR(NW7-), CODE 39, CODE 93, INTERLEAVED 2OF5, STANDARD 2OF5, MATRIX 2OF5, CODE 128, EAN/UCC 128, CODE 11, CHINESE POST
Environmental	RoHS
Dimensions	Scanner:70mmx95mmx168mm(L *W*H) Base:145mmx112mmx7 4mm(L *W*H)
Weight	Scanner, 172g Base, 188g

CP310-i-W

2D CMOS Handheld Wireless
Barcode Scanner

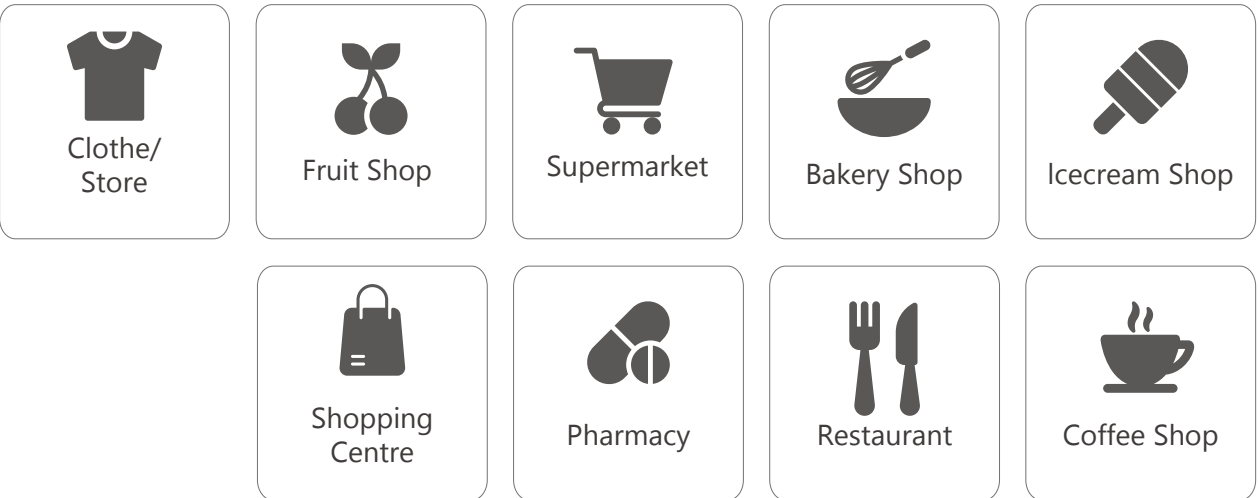

Features

- **Consistent, fast and accurate:** CP310-i-W barcode scanner can accurate read blurring, incomplete, dirty code, damaged code, high capacity bar code at a super fast speed in different environments.
- **Reads Bar Codes** on Various Media: Not only read codes on printed paper, it could also read codes on mobile phones and computer displays, with this scanner, you will be ready for the coming mobile barcodes revolution.
- **Superior decoding performance:** High resolution:648x488 pixels fast and accurate . Low decoding error rate can help to improve your working efficiency.
- **Perfect process design and ultimate experience:** CP-310i-W uses imported ABS material, high quality rubber is a good buffer against impact. Nice design makes it different and popular.
- **Long life span:** Shockproof and Anti-broken, The barcode scanner, after 1.2 drop onto concrete surface floor, still works well. Famous brand C&k button, The barcode scanner uses world famous brand C&k trigger button, even after 1,500,000 times trigger, it still works normally.



1D




Screen scanning



2500pix imaging



RF33 4



Super decoder



Free USB driver




Fast scan

Main Specification

Communications	RF433
Transmission range	≥100M(In empty area 100M)
Interface	USB HID keyboard/USS VCP/ RS232-(Wireless receiver)
Operation mode	Read-time mode, Inventory mode, Cache mode
Memory	13@100,000Byte barcode
Battery capacity	2000mAh (Lithium battery)
Charging time	5h
Working time (Full charge)	6h(Continuous reading situation) 12h(Manual reading situation) More than 15 days(Stand-by time)
Voltage requirement	DC 5V%10±(scanner)
Current consumption	Max: 180mA
Light source	632nm Red LED
AIM light source	Red Bar LED
Photo sensor	CMOS arraay sensor
Decode angle	Pitch angle:65±' Skew angle:60±' Tilt angle:180±'
Min resolution	1D:4mil(0.101mm) 2D:7mil(0.178mm)
Min .PCS value	%20UPC/EAN 13)13mil)
Field of View	40'(H), 29' (V)
Compatibility	Win OS / Mac OS/ Linux Android/IOS/Embedded OS
Decode Capability	1D: JUPC/EAN, Code 128, Code 39,Code 93, Interleaved 2 of 5,Codabar 2D: QR ,Mirco QR,PDF417 ,MircoPDF417, Data Matrix.Aztec
Environmental	RoHS
Dimensions	Scanner:70mmx95mmx168mm(L *W*H) Base:145mmx112mmx74mm(L*W*H)
Weight	Scanner 185g Base 186g

CP400-i-USB

2D Industrial Hands-free
Platform Scanner

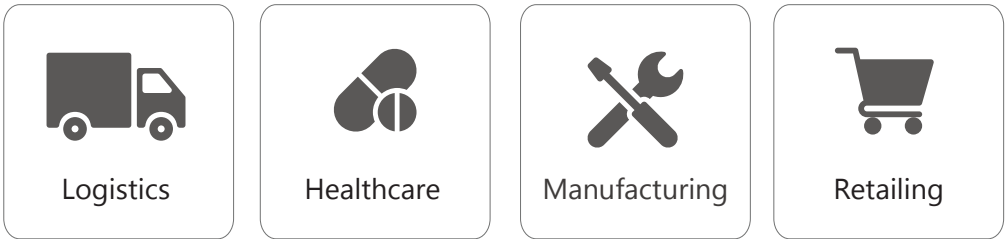

Features

- ▶ **Excellent Identification Ability:** High performance scanning module, with superior wide field-of-view, omni-directional scanning capability.
- ▶ **Automatic interface detection:** Enable the scanner to configure appropriate interface once connected, avoid the tedious task of scanning programming
- ▶ **Convenient and Comfortable Operation:** Fashionable, small and ergonomics design to provide superior operation experience, save room and boost work efficiency.
- ▶ **High Quality:** Adopt high quality wires and inflaming retarding materials with the international standard, recyclable and practical shell to protect the device.
- ▶ **Industrial Grade Durability:** IP54 industrial grade, no worry operate device in dust and moist circumstances.


CP400-i-USB

2D Industrial Hands-free
Platform Scanner

Performance Parameters	
Image sensor	CMOS
Resolution	1280x800 pix
Decode capability	1D: UPC/EAN, Code 128, Code 39, Code 39 (Full ASCII), code32,Interleaved 2of 5, Matrix 2 of 5, Discrete 2 of 5, Codabar, Chinese 2 of 5, China Postal Code, GS1 DataBar, etc. 2D: PDF417, Micro PDF417, QR code, Micro QR, Data Matrix, Aztec, etc.
Scan Angle	°65± ,°70± ,°360± (Roll, Skew, Pitch)
Scan precision	≥ 4mil
Depth of field	650-20mm
Print contrast	≥ 20%
Prompt mode	Buzzer, LED indicator light
Interface	USB, USB-COM
Trigger mode	Auto-induction scanning
Setting method	Scan configuration barcode
Current and voltage	160mA (standby), 270mA (working), 5VDC%10±
Physical Parameters	
Over dimension	L X W X H (103x105x150mm)
Weight	265g
Material	ABS+PC environmentally friendly materials
Environmental Parameters	
Working temperature	°20-C to °50C
Storage temperature	°40-C to °60C
Anti-drop	1.5m
Humidity	%5 to %95 RH
IP grade	IP54
Circumstance luminance	0-100,000Lux

CP-S01

Scanner Stand

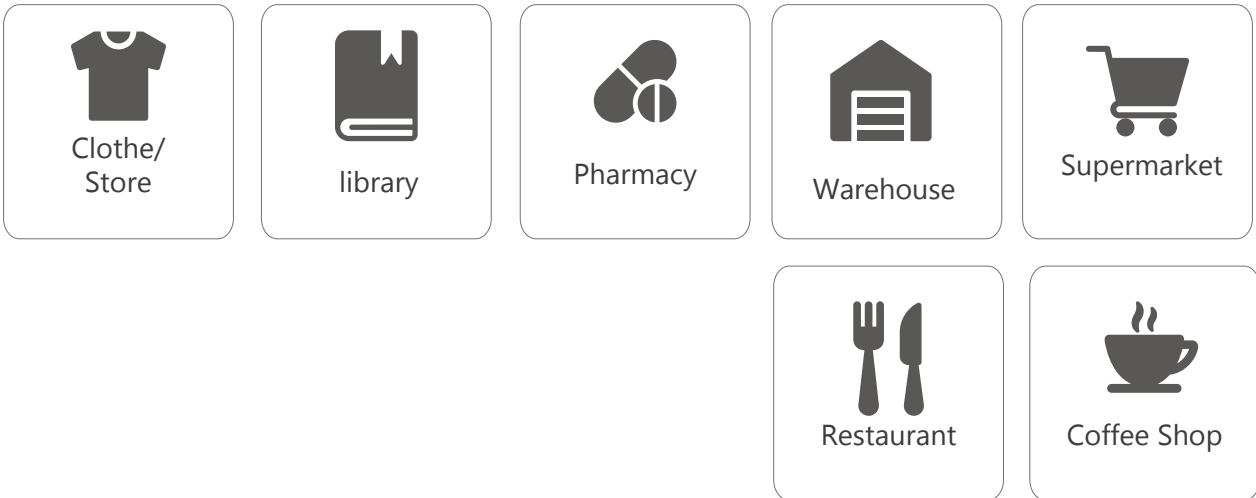

Features


- ▶ Hand-Free Stand, Allowed to adjust any angle for better laying up, multi scan angle, greatly improved work efficiency.
- ▶ ABS+PC material, Ultra comfort and light design for lifetime use, handy for all applications .
- ▶ Long life span, Stable to hold the scanner and prevent scanner from falling off

Main Specification

Weight	540 g
Dimensions	(width x depth x height): 20.5 x 27.0 x 26.5 cm
Color	Black
Features	40
Material	ABS
Compatibility	up to 15 cm.
Recyclable	Yes

CP-S02

Scanner Stand

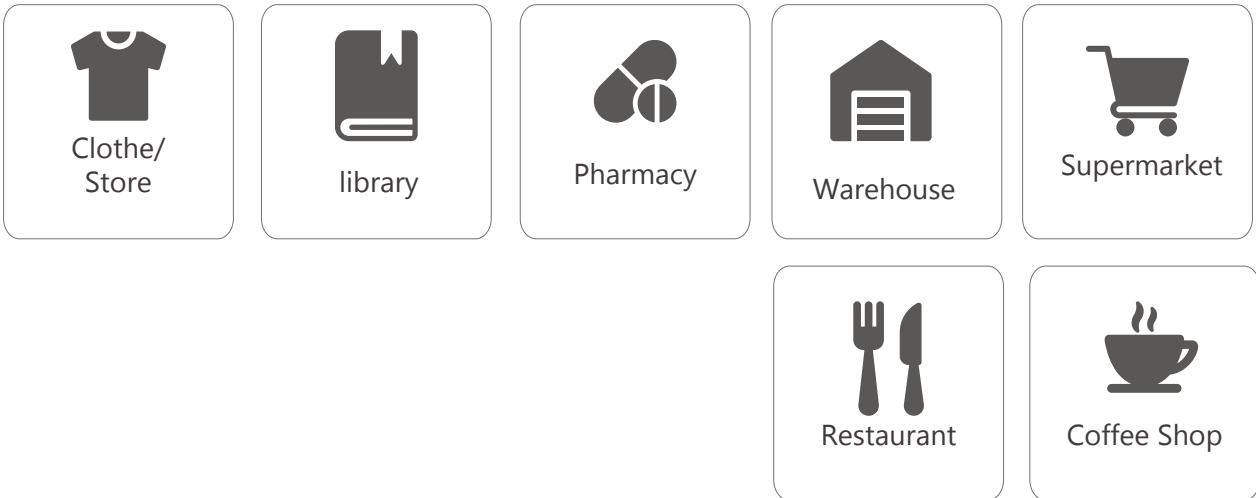

Features


- ▶ Allowed to adjust any angle for better laying up, multi scan angle, greatly improved work efficiency.
- ▶ The stand is designed for mostly popular handheld barcode scanner on the market, fit for different brand and models. .
- ▶ Helpful for application of POS system, Production Line, Library, Logistics, etc.
- ▶ %100 green eco ABS material, poison-free and recyclable
- ▶ Stable to hold the scanner and prevent scanner from falling off.
- ▶ Ultra comfort and light design for lifetime use, handy for all applications.

Main Specification

Weight	540 g
Dimensions	(width x depth x height): 20.5 x 27.0 x 26.5 cm
Color	Black
Features	40
Material	ABS
Compatibility	up to 15 cm.
Recyclable	Yes


CP-CP710N

ID Card Printer

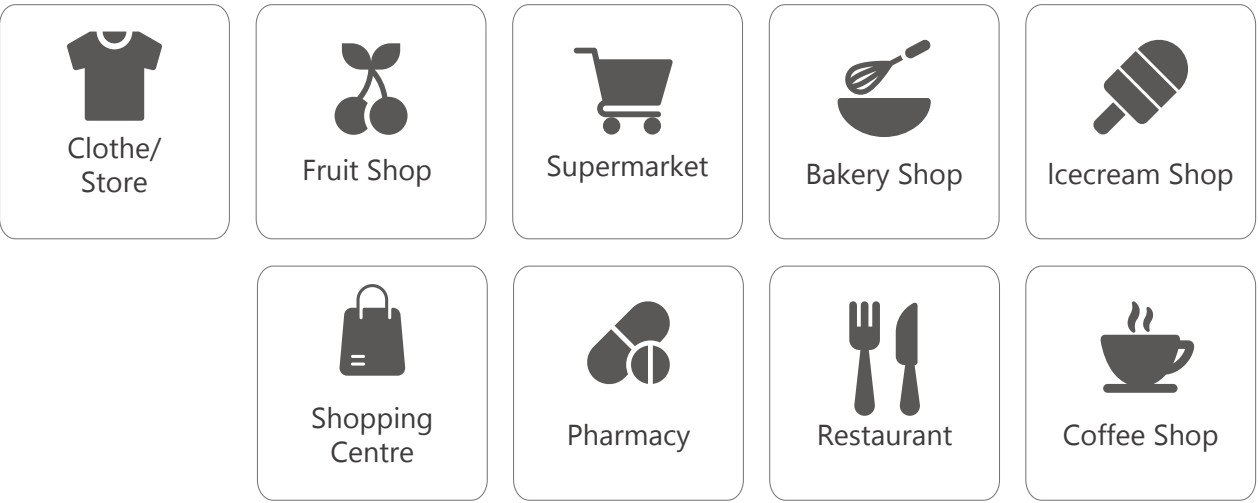

Features


- ▶ Dual hoppers (optional)
- ▶ High Security : Kensington® physical lock, Multiple enclosures locks
- ▶ Compact design, light weight
- ▶ Wi-Fi option & Mobile application




IC/RF



WIFI



Dual Side



MS

Printing Features

Print Technology	Direct-to-card dye-sublimation / Resin thermal transfer	
Print Capabilities	Single / Dual sided printing Additional hopper for the 2nd type cards or the extended q'ty Full-color and monochrome printing capability Alphanumeric text, logos and digitized signatures	
Print Resolution	300 dpi (11.8 dpm), 16.7 Million Color	
Print Speed	Color	Single side (YMCKO) 200 ~ 180 card/hour
		Dual side (YMCKOK) 140 card/hour
		Dual side (YMCKO) 95 cards/hour
	Monochrome	Monochrome up to 600 cards/hour
Card	Automatic card feeding : 100 card input (0.76mm) -up to 200 cards with dual hopper option	
	Output hopper: 60~50 cards (0.76mm)	
	Manual single Feed : 1 card input	

Ribbon

Color Ribbon	YMCKO : 200 prints/roll , 250 prints/roll
	YMCKOK : 170 prints/roll , 210 prints/roll
	Half YMCKO: 400 prints/roll
	UCYMCK : 220 prints/roll or 270 prints/roll
Monochrome Ribbon	K: 1,000 prints/roll (Blue, Red, Green, White, Metallic Gold, Metallic Silver),
	K: 1,500 prints/roll (Black)
	KO : 500 prints/roll , 550 prints/roll
	SCRATCH : 1,200 prints/roll , 1,300 prints/roll
	SOKO : 300 prints/roll , 350 prints/roll
	WB : 500 prints/roll , 550 prints/roll

Printer Encoding Option


Magnetic Stripe Encoding	ISO 7811 (Track 3 ,2 ,1) , JIS II. Coercivity: HiCo/LoCo
Contact Smart Card Encoding	ISO7816, EMV Level 1(PC/SC or Serial)
Contactless Smart Card Encoding	Mifare, ISO 14443 A / B, Desfire, NFC, Felica (PC/SC or Serial) *Other encoding options are available upon request
SAM	PLCC 1 (Extra-1 Sockets), SIM 4 sockets
Mobile Chip Card	ISO 7816
Scanner	CIS (600/300 dpi)

Physical Features

Dimension	CP-CP710N	184 (W) × 366(L) × 228(H)mm
Weight	CP-CP710N	4.5kg
Power	Input	240-100V 60/50Hz 1.7A
	Output	DC 24.3V 2.5A
Temperature	Operating	°35~15C / °95 ~59F (Color printing), °40~15C / °104 ~59F (Mono printing)
	Storage	°60~10-C / 140~14 °F
Humidity	Operating	65 ~ 20 % non-condensing
	Storage	70 ~ 20 % non-condensing
Font	True Type Fonts via Windows Drivers	
Memory	128MB RAM	
Interface	USB2.0 (High-Speed), Built in 100/10 Ethernet	
Operation System for Printer Driver	Windows ®7/8/8.1/10/Vista/XP/Server 2012 ,2012 R2008 ,2008 ,2 R2003 ,2	
Certifications	FCC Class A, CE (EN 55022 Class A, EN 55024), CCC, KCC, Energy STAR, RoHS	
Security	Kensington ® physical lock / Hopper lock(optional), Printer lid lock(optional)	
Software	Card Designer 2.0™	
Limited Warranty	Printer – 2 years, Printer Head – 2 years	

CP-WS113

Price Computing Scale

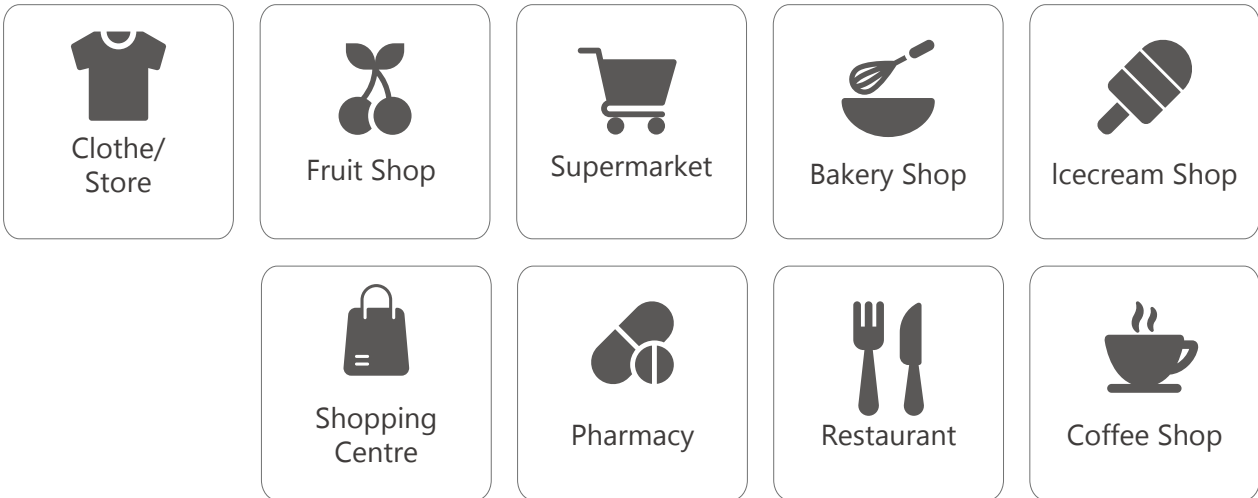

Features


- Capacity (kg): 30
- LCD display with back light
- Rechargeable Battery Inside
- Auto zero-setting when switch on the scale



LCD
Display



30 KG
Capacity




Rechargeable
Battery

Main Specification

Capacity	30kg
Resolution	3000
Division	10g
Accuracy	III
Battery	Rechargeable Battery Inside
Charging time	12 Hours
Working time (Full charge)	10h(Continuous reading situation) 24h(Manual reading situation) 10 months(Stand-by time)
Keypad	24 keys with 7 memory
Display	LCD with back light
Power Supply	AC 220V (50 / (%10± Hz, 0 11V/60HZ, DC 5V / 1.5A (Rechargeable Li accumulator inside)
Pan Size	(225 x 325) mm
Scale Size	(340 x 340 x 110) mm
Working Temperature	0 QC - 40+ QC
Relative Humidity	< %85 RHd
Special Feature	Auto zero-setting when switch on the scale Auto zero-tracing

CP-LWS201

30kg Barcode Label Scale

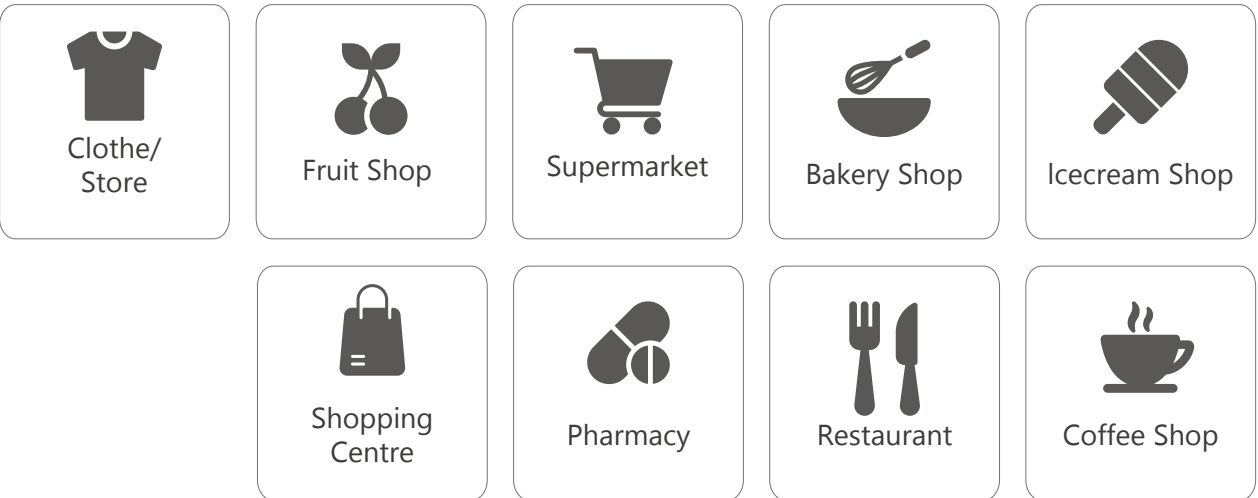

Features


- Capacity (kg): 30
- Report printing function
- Communication with RS232, Ethernet and USB-Host interface
- Main Circuit is air proof, high waterproof and insect proof



LCD
Display



30 KG
Capacity



Rechargeable
Battery

Main Specification	
Capacity	30kg
Resolution	3000
Division	10g
Accuracy	III
Label Size	40mmx 50mm
Printing Speed	75mm /s
Interface	RS232, Ethernet, USB
Keypad	To tal 105 keys, can set and 126 short PLU
Paper	Support generic thermal pper and thermal sticker
Print Mode	Receip t Print Mode and Label Print Mode
Display	White LCD （negative）display, 4 dig it in tare window, 5 digit in weight window, 6 digit in un it price window, 7 digit in total price window
Power Supply	AC 200V~240V, 60/50Hz
Pan Size	392 x 253mm
Packing Size	1PC /Carton, 495 x 290 x 515mm
Printing Information	Include date, shelf date, unit price, total price, weight, quantity, cargo name, shop name, PLU number, barcode, etc.
Operation Authorization	Sale, program and check are operated by difference password
Cash Drawer Interference	Basic with 1 drawer and can be extended to 2 drawers
Special Feature	All scale parameter, print format and PLU information can be edited on scale and PC. And the editing information can be downloaded from Ethernet or transfer saved by U-disk
Report Printing Option	Support daily report, monthly report and quarterly
Printing Operation	Support single operate printing and accumulate operation printing

CP-LWS-301BLA

Barcode Label Weighing Scale



Features

- ▶ Support generic thermal paper and thermal sticker part
- ▶ Support working modes: Pre-pack, Batch Print
- ▶ Main Circuit is air proof, high waterproof and insect proof
- ▶ Precision selectable



Receipt /
label print



30 KG
Capacity




Ethernet /
USB

Main Specification

Capacity	30kg
Resolution	3000
Division	10g
Accuracy	III
Label Size	40mm x 50mm
Printing Speed	75mm /s
Interface	RS232, Ethernet , USB
Keypad	To tal 105 keys, can set and 126 short PLU
Paper	Support generic thermal paper and thermal sticker
Print Mode	Receip t Print Mode and Label Print Mode
Display	White LCD （negative ）display, 4 digit in tare window, 5 digit in weight window6 digit in un it price window, 7 digit in total price window
Power Supply	AC 200V~240V, 60/50Hz
Pan Size	392 x 253mm
Packing Size	1PC /Carton, 495 x 290 x 515mm
Printing Information	Include date, shelf date, unit price, total price, weight, quantity, cargo name, shop name, PLU number, barcode, etc.
Operation Authorization	Sale, program and check are operated by difference password
Cash Drawer Interference	Basic with 1 drawer and can be extended to 2 drawers
Special Feature	All scale parameter, print format and PLU information can be edited on scale and PC. And the editing information can be downloaded from Ethernet or transfer saved by U-disk
Report Printing Option	Support daily report, monthly report and quarterly
Printing Operation	Support single operate printing and accumulate operation printing

CP-PWS300KG

Weighing Platform Scale

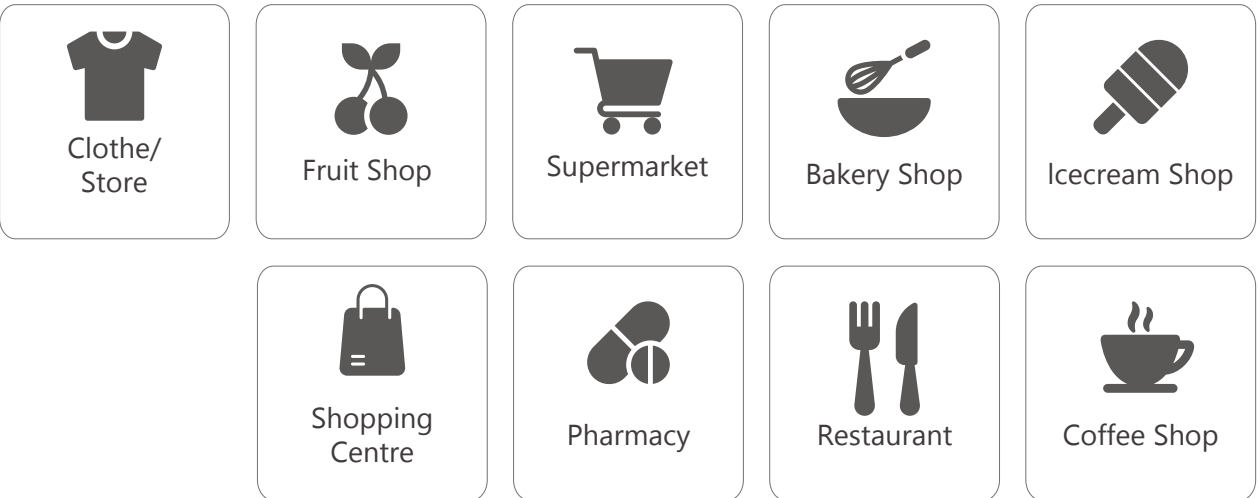

Features


- Capacity (kg): 300
- LCD display with back light
- Rechargeable Battery Inside
- Adjustment, Feet height can be adjusted



LCD
Display



300 KG
Capacity



Rechargeable
Battery

Main Specification

Capacity	300kg
Resolution	3000
Division	100g
Accuracy	III
Display	LCD with back light
Platform Size	(450 x 600) mm
Platform Details	Steel diamond platform with powder coated treating
Adjustment Details	Feet height can be adjusted
Battery	Rechargeable Battery Inside
Charging time	12 Hours
Working time (Full charge)	10h(Continuous reading situation) 24h(Manual reading situation) 10 months(Stand-by time)
Power Supply	AC 220V (50 / (%10± Hz, 0 11V/60HZ, DC 5V / 1.5A (Rechargeable Li accumulator inside)
Working Temperature	0 QC - 40+ QC
Relative Humidity	≤85 % RHd
Special Feature	Auto zero-setting when switch on the scale Auto zero-tracing